

ECH250V



Pitch:2.50mm

Approval		
Technical Data	UL	IEC
Rated voltage	150V	130V
Rated current	4A	4A
Wire range		
Solid wire(AWG)		
Stranded wire(AWG)		
Rated surge voltage (UL/IEC/Max.)		
Torque(Lb-in)		
Screw		
Wire strip length		

Pole	Cat. No.
02	ECH250V-02P
:	:
:	:
24	ECH250V-24P

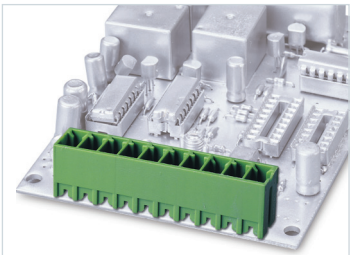

ECH350V(ECH381V)



Pitch:3.50mm(3.81mm)

Approval		
Technical Data	UL	IEC
Rated voltage	300V	130V
Rated current	8A	8A
Wire range		
Solid wire(AWG)		
Stranded wire(AWG)		
Rated surge voltage (UL/IEC/Max.)	1.6 / 1.25 / 3 KV	
Torque(Lb-in)		
Screw		
Wire strip length		

Pole	Cat. No.
02	ECH350V-02P(ECH381V-02P)
:	:
:	:
24	ECH350V-24P(ECH381V-24P)

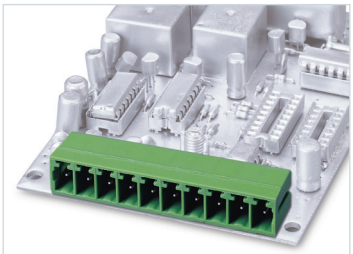

ECH350R(ECH381R)



Pitch:3.50mm(3.81mm)

Approval		
Technical Data	UL	IEC
Rated voltage	300V	130V
Rated current	8A	8A
Wire range		
Solid wire(AWG)		
Stranded wire(AWG)		
Rated surge voltage (UL/IEC/Max.)	1.6 / 1.25 / 3 KV	
Torque(Lb-in)		
Screw		
Wire strip length		

Pole	Cat. No.
02	ECH350R-02P(ECH381R-02P)
:	:
:	:
24	ECH350R-24P(ECH381R-24P)

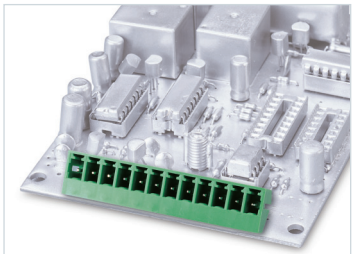

ECH381A



Pitch:3.81mm

Approval		
Technical Data	UL	IEC
Rated voltage	160V	130V
Rated current	8A	8A
Wire range		
Solid wire(AWG)		
Stranded wire(AWG)		
Rated surge voltage (UL/IEC/Max.)		
Torque(Lb-in)		
Screw		
Wire strip length		

Pole	Cat. No.
02	ECH381A-02P
:	:
:	:
24	ECH381A-24P



ECH250R



Pitch:2.50mm

Approval		
Technical Data	UL	IEC
Rated voltage	150V	130V
Rated current	4A	4A
Wire range		
Solid wire(AWG)		
Stranded wire(AWG)		
Rated surge voltage (UL/IEC/Max.)		
Torque(Lb-in)		
Screw		
Wire strip length		

Pole	Cat. No.
02	ECH250R-02P
:	:
:	:
24	ECH250R-24P

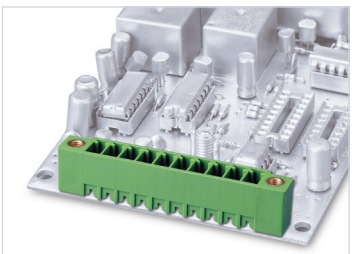

ECH350VM(ECH381VM)



Pitch:3.50mm(3.81mm)

Approval		
Technical Data	UL	IEC
Rated voltage	300V	130V
Rated current	8A	8A
Wire range		
Solid wire(AWG)		
Stranded wire(AWG)		
Rated surge voltage (UL/IEC/Max.)	1.6 / 1.25 / 3 KV	
Torque(Lb-in)		
Screw		
Wire strip length		

Pole	Cat. No.
02	ECH350VM-02P(ECH381VM-02P)
:	:
:	:
24	ECH350VM-24P(ECH381VM-24P)

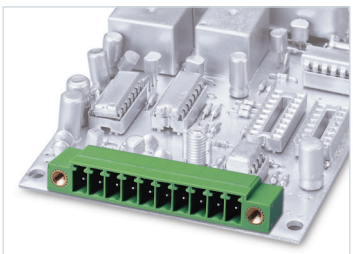

ECH350RM(ECH381RM)



Pitch:3.50mm(3.81mm)

Approval		
Technical Data	UL	IEC
Rated voltage	300V	130V
Rated current	8A	8A
Wire range		
Solid wire(AWG)		
Stranded wire(AWG)		
Rated surge voltage (UL/IEC/Max.)	1.6 / 1.25 / 3 KV	
Torque(Lb-in)		
Screw		
Wire strip length		

Pole	Cat. No.
02	ECH350RM-02P(ECH381RM-02P)
:	:
:	:
24	ECH350RM-24P(ECH381RM-24P)

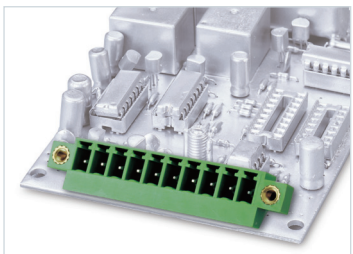

ECH381AM



Pitch:3.81mm

Approval		
Technical Data	UL	IEC
Rated voltage	160V	130V
Rated current	8A	8A
Wire range		
Solid wire(AWG)		
Stranded wire(AWG)		
Rated surge voltage (UL/IEC/Max.)		
Torque(Lb-in)		
Screw		
Wire strip length		

Pole	Cat. No.
02	ECH381AM-02P
:	:
:	:
24	ECH381AM-24P