
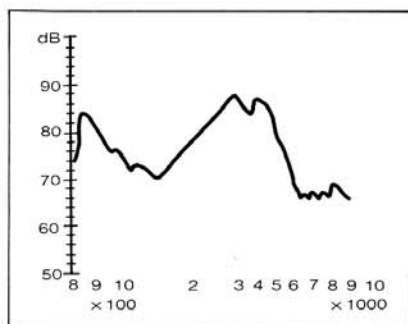


SPEAKERS

■ FEATURES


- Super-thin profile
- Stainless steel diaphragm
- 8 ohm standard impedance
- Light weight
- Broad frequency range
- Connector or lead wire can be soldered to terminal

MODEL NO. ELS50S

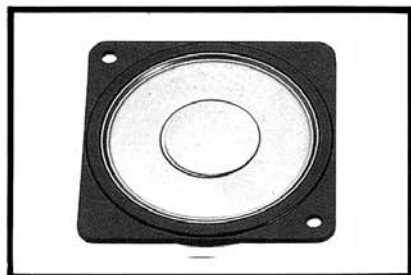

■ SPECIFICATIONS


Type		ELS50S
Rated Input	(W)	0.4
Max. Input	(W)	0.8
Impedance (at 1KHz)	(Ω)	8
Sound Output at 10cm	(dB)	70
Distortion	(Hz)	10%max./2K
Response	(Hz)	500-6K
Operating Temperature	(°C)	-20 ~ +55
Storage Temperature	(°C)	-40 ~ +80
Weight	(g)	12.5

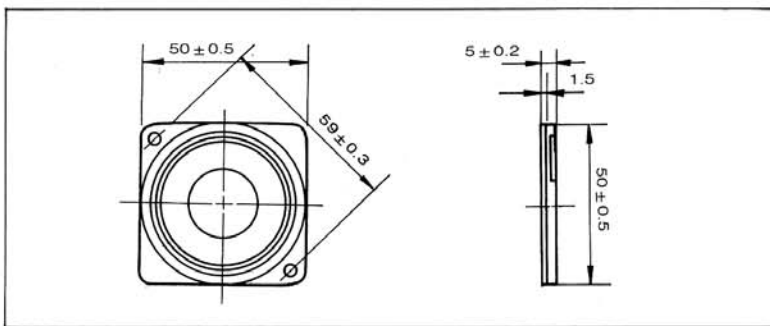

■ FEATURES

- Super-thin profile
- Stainless steel diaphragm
- 8 ohm standard impedance
- Light weight
- Broad frequency range
- Connector or lead wire can be soldered to terminal

MODEL NO. ELS50R

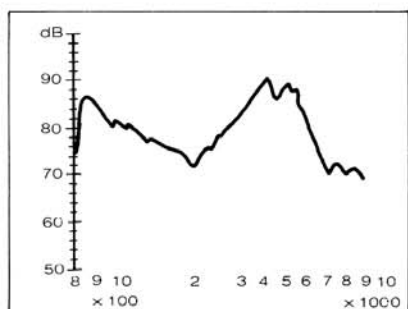

■ SPECIFICATIONS

Type		ELS50R
Rated Input	(W)	0.4
Max. Input	(W)	0.8
Impedance (at 1KHz)	(Ω)	8
Sound Output at 10cm	(dB)	70
Distortion	(Hz)	10%max./2K
Response	(Hz)	500-6K
Operating Temperature	(°C)	-20 ~ +55
Storage Temperature	(°C)	-40 ~ +80
Weight	(g)	11

