

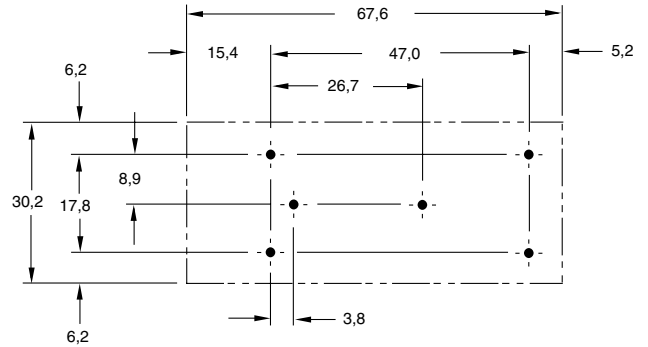
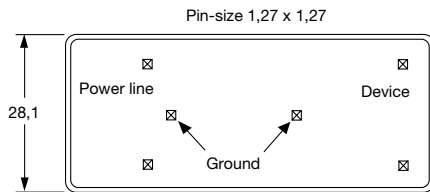


## Case Styles and typ. Sizes

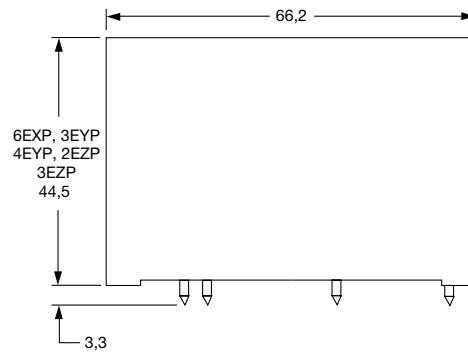

Tolerance 0,15 Hole 1,9 Dia

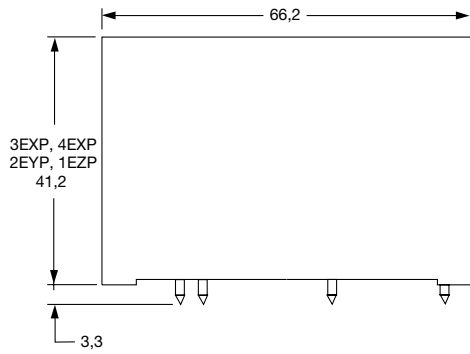


## PCB Filters for various requirements

- Applications: gambling machines, ATMs, office appliances.
- For higher requirements




| Type   | Max.current VDE | Inductance | Capacity $C_x$ | Capacity $C_y$ | Max. leakage current line to ground |                        |
|--------|-----------------|------------|----------------|----------------|-------------------------------------|------------------------|
| F-3443 | 3A              | 2x2mH      | 0,1 $\mu$ F    | 2x3nF          | 0,50mA                              | Ground line inductance |

### Electrical Schematic

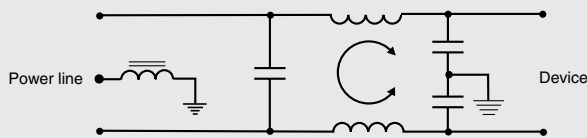

### Case Styles and typ. Sizes

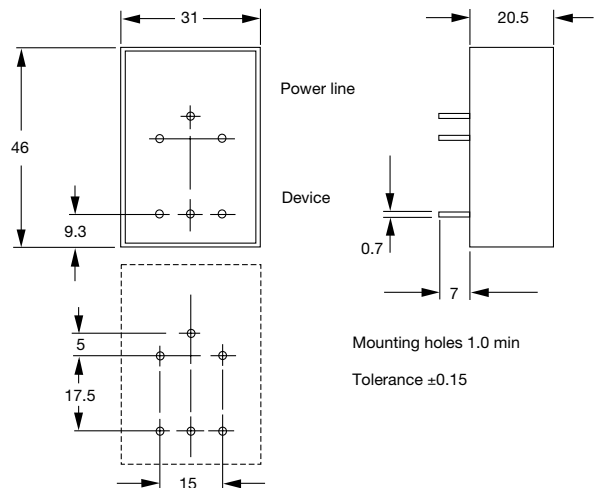

### Typ. Insertion Loss in dB

asym. — sym. —

