

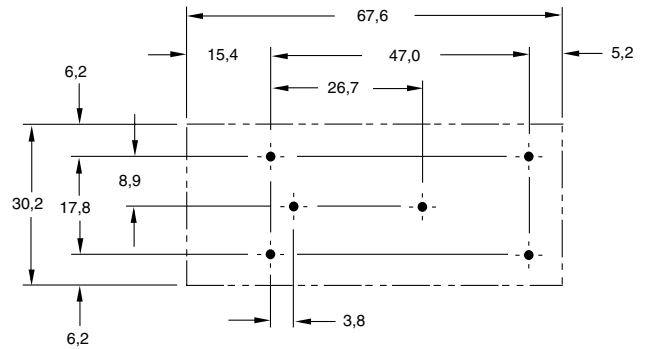
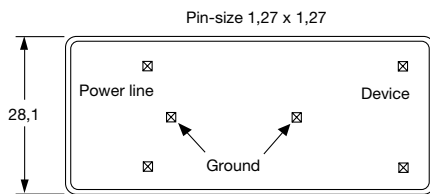


Case Styles and typ. Sizes

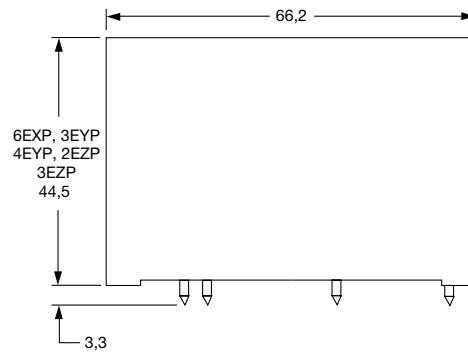

Tolerance 0,15 Hole 1,9 Dia

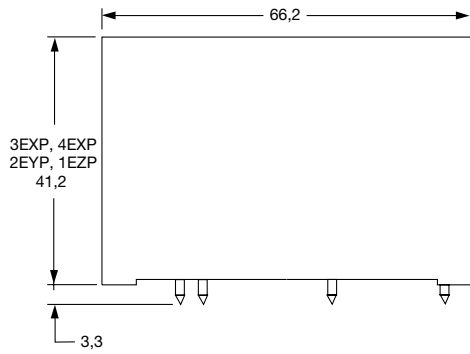


PCB Filters for various requirements

- Applications: gambling machines, ATMs, office appliances.
- For higher requirements




Type	Max.current VDE	Inductance	Capacity C_x	Capacity C_y	Max. leakage current line to ground	
F-3443	3A	2x2mH	0,1 μ F	2x3nF	0,50mA	Ground line inductance

Electrical Schematic

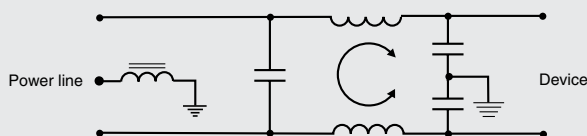

Case Styles and typ. Sizes

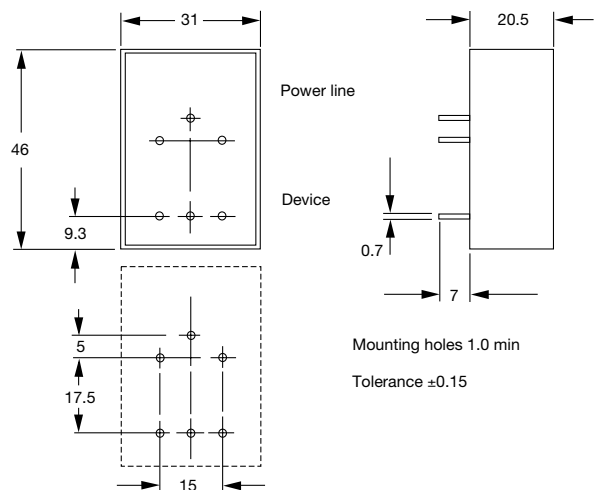

Typ. Insertion Loss in dB

asym. — sym. —

