



# DPF SERIES

DUAL-PORT  
WITH FERRITE  
9/9, 15/15, 25/25

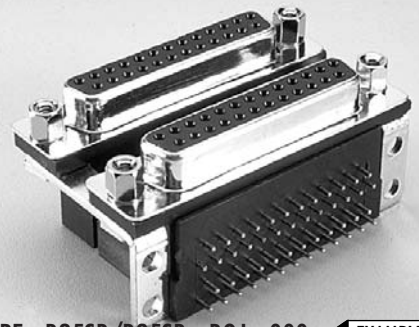

DPF - B25SB/B25SB - BOJ - 000 ◀ EXAMPLE

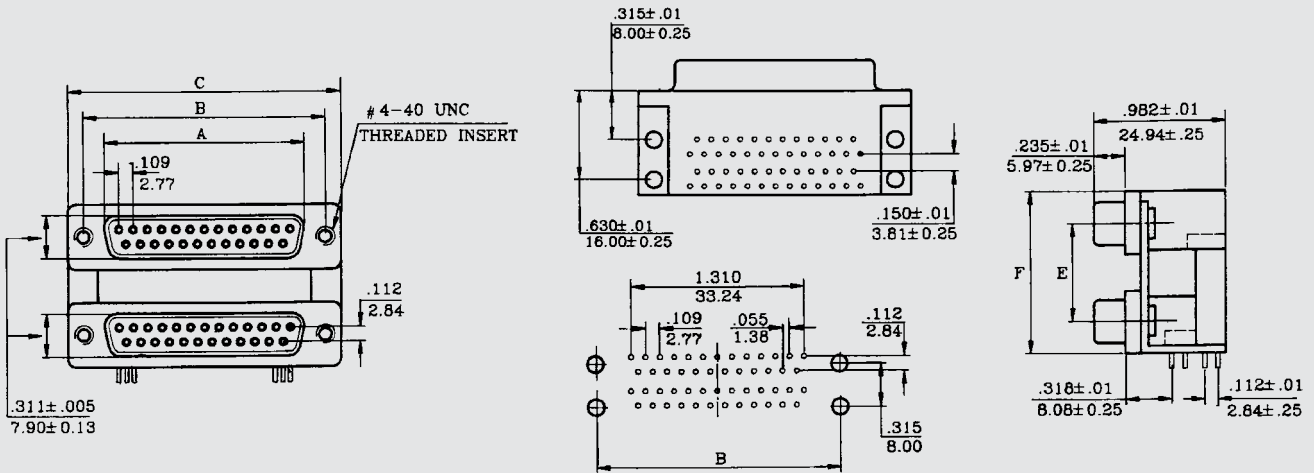

## DIMENSIONS

SHELL SIZE	A .010 0.25	B .005 0.13	C .015 0.38
9 (E)	0.643 16.33	0.984 24.99	1.213 30.81
15 (A)	0.971 24.66	1.312 33.32	1.541 39.14
25 (B)	1.511 38.38	1.852 47.04	2.088 53.04

VERTICAL DIMENSION BETWEEN CONNECTORS	E 0.010 0.25	F 0.015 0.8
A	0.75 19.05	1.244 31.60
B	0.90 22.86	1.394 35.41
C	0.625 15.88	1.119 28.42

## FERRITE SPECIFICATIONS

ITEM	Measure value	Test Frequency
Z (ohm)	20 MIN	30 MHz
Z (ohm)	30 MIN	50 MHz
Z (ohm)	50 MIN	100 MHz

To return to this page use return button in your browser

● MOUNTING OPTIONS:  
SEE PAGE 13

## HOW TO ORDER

SERIE	TOP CONNECTOR			BOTTEM CONNECTOR			MOUNTING OPTIONS	CONTACT PLATING	INSULATOR COLOR	SHELL FINISH
	SHELL	PINS	M/F	SHELL	PINS	M/F				
EXAMPLE ▶ DPF	B	25	SB	B	25	SB	BOJ	0	0	0
DPF	E A B	9 15 25	P SB	E A B	9 15 25	P SB	*BO PAGE.13	*0 = G/F 4 = 15μ" 1 = SEL G/F 5 = 20μ" 2 = 5μ" 6 = 30μ" 3 = 10μ"	*0 = BLACK 1 = WHITE 2 = BLUE 3 = GRAY	*0 = TIN 1 = NICKEL 2 = ZINC 3 = PLASTIC

\*STANDARD