

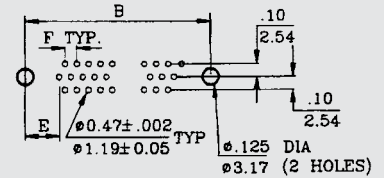


DRHF SERIES


D-SUB
HIGH DENSITY
RIGHT ANGLE
WITH FERRITE



DRHF - E15SB - NJ - 000 ◀ EXAMPLE

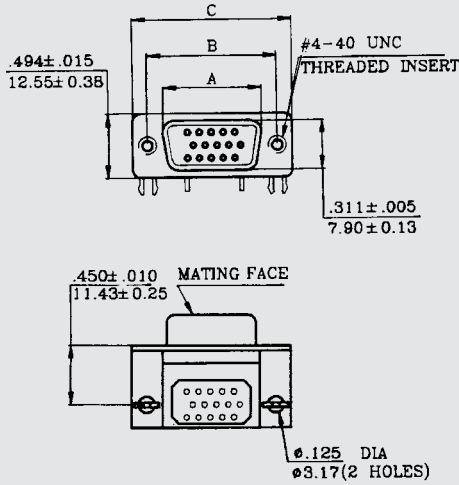

26, 44, 62 POSITIONS

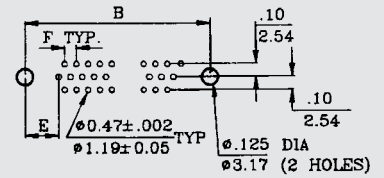

15 POSITIONS

PCB HOLE PATTERNS

MOUNTING OPTIONS:

- X:** GROUNDING BRACKET, WITH JACK SCREWS
- N:** GROUNDING BRACKET, WITH #4-40 THREADED INSERTS
- NJ:** GROUNDING BRACKET, WITH #4-40 THREADED INSERTS, AND JACK SCREWS ASSEMBLED TO CONNECTOR
- NS:** GROUNDING BRACKET, WITH ROUND #4-40 FIXED STANDOFF

DIMENSIONS

SHELL SIZE	NO. OF CONTACT POSITIONS	A 0.010 0.25	B 0.005 0.13	C 0.015 0.38	E 0.010 0.25	F 0.005 0.13
E	15	0.643 16.33	0.984 24.99	1.213 30.81	0.277 7.04	0.090 2.29

FERRITE SPECIFICATIONS

ITEM	Measure value	Test Frequency
Z (ohm)	20 MIN	30 MHz
Z (ohm)	30 MIN	50 MHz
Z (ohm)	50 MIN	100 MHz

HOW TO ORDER

SERIE	SHELL	PINS	M/F	MOUNTING OPTIONS	CONTACT PLATING	INSULATOR COLOR	SHELL FINISH
EXAMPLE DRHF	E	15	SB	NJ	0	0	0
DRHF	E	15	SB	*NJ X N NS	*0 = G/F 4 = 15µ" 1 = SEL G/F 5 = 20µ" 2 = 5µ" 6 = 30µ" 3 = 10µ"	*0 = BLACK 1 = WHITE 2 = BLUE 3 = GRAY	*0 = TIN 1 = NICKEL 2 = ZINC 3 = ALL PLASTIC

*STANDARD