

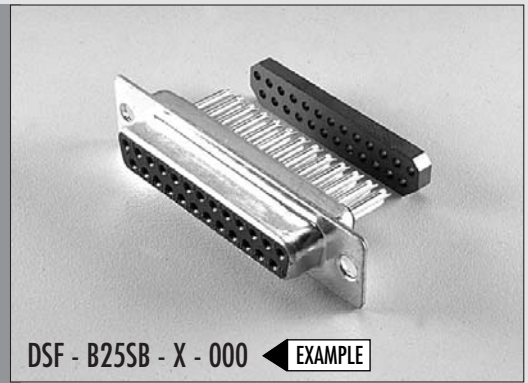



DSF SERIES

D-SUB SOLDER TYPE WITH FERRITE

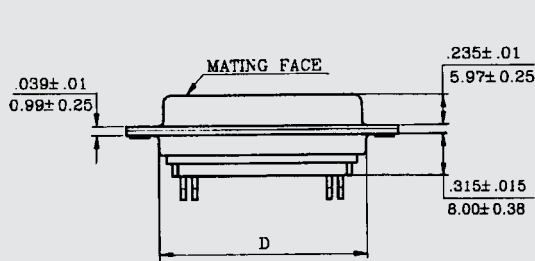

DSF - B25SB - X - 000 ◀ EXAMPLE

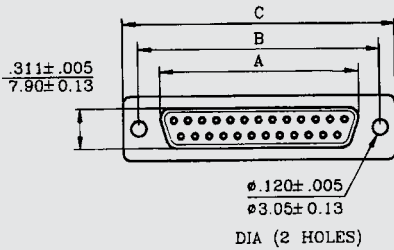

DIMENSIONS

SHELL SIZE	A	B	C	D	E
	0.010 0.25	0.005 0.13	0.015 0.38	0.010 0.25	0.015 0.38
9 (E)	0.643 16.33	0.984 24.99	1.213 30.81	0.759 19.28	0.429 10.90
15 (A)	0.971 24.66	1.312 33.32	1.541 39.14	1.083 27.51	0.429 10.90
25 (B)	1.511 38.38	1.852 47.04	2.088 53.04	1.625 41.28	0.429 10.90
50 (D)	2.064 52.43	2.406 61.11	2.635 66.93	2.178 55.32	0.429 10.90

FERRITE SPECIFICATIONS

ITEM	Measure value	Test Frequency
Z (ohm)	20 MIN	30 MHz
Z (ohm)	30 MIN	50 MHz
Z (ohm)	50 MIN	100 MHz

To return to this page use return button in your browser

• MOUNTING OPTIONS:
SEE PAGE 28

HOW TO ORDER

SERIE	SHELL	PINS	M/F	MOUNTING OPTIONS	CONTACT PLATING	INSULATOR COLOR	SHELL FINISH
EXAMPLE → DSF	B	25	SB	X	0	0	0
DSF	E A B C	9 15 25 37	P SB	*X PAGE 28	*0 = G/F 1 = SEL G/F 2 = 5 μ" 3 = 10 μ" 4 = 15 μ" 5 = 20 μ" 6 = 30 μ"	*0 = BLACK 1 = WHITE 2 = BLUE 3 = GRAY	*0 = TIN 1 = NICKEL 2 = ZINC 3 = ALL PLASTIC

*STANDARD