


MOUNTING OPTIONS


OPTION H

WITH .125 DIAMETER NON-THREADED MOUNTING HOLES AND WITH RIVETED THREADED INSERTS

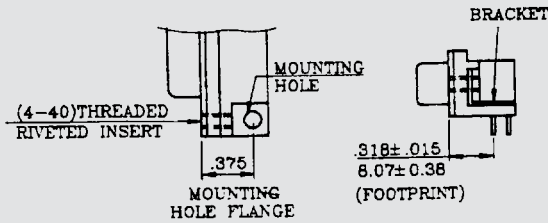


OPTION O

WITH GROUNDING STRAPS, WITH .125 DIAMETER NON-THREADED MOUNTING HOLES AND WITH RIVETED THREADED INSERTS

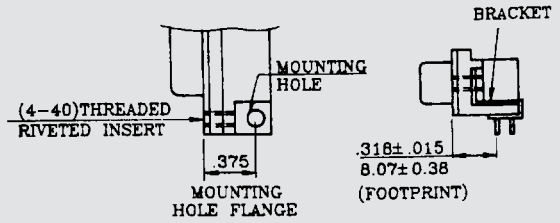


OPTION HJ

WITH .125 DIAMETER NON-THREADED MOUNTING HOLES WITH RIVETED THREADED INSERTS AND JACK SCREWS ASSEMBLED TO CONNECTOR

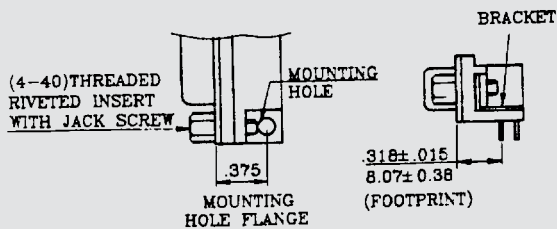


OPTION OJ

WITH GROUNDING STRAPS, WITH .125 DIAMETER NON-THREADED MOUNTING HOLES, WITH RIVETED THREADED INSERTS AND JACK SCREWS ASSEMBLED TO CONNECTOR

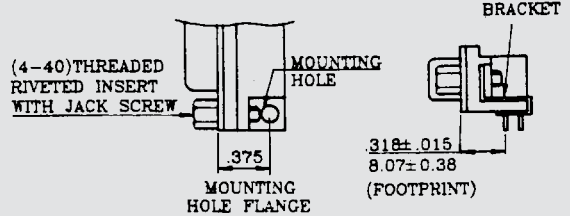


OPTION HS

WITH .125 DIAMETER NON-THREADED MOUNTING HOLES AND WITH ROUND 4-40 FIXED STANDOFF

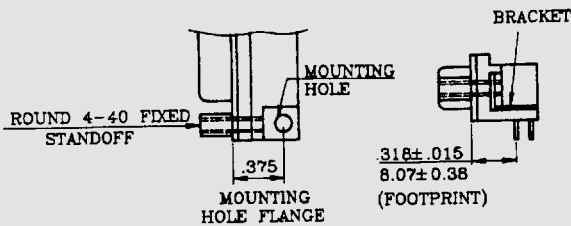


OPTION OS

WITH GROUNDING STRAPS, WITH .125 DIAMETER NON-THREADED MOUNTING HOLES AND WITH ROUND 4-40 FIXED STANDOFF

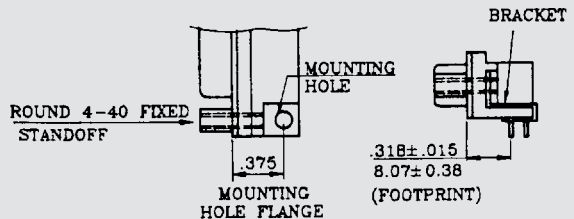

OPTION HT

WITH .125 DIAMETER NON-THREADED MOUNTING HOLES AND WITH .125 DIAMETER NON-THREADED RIVETED INSERTS

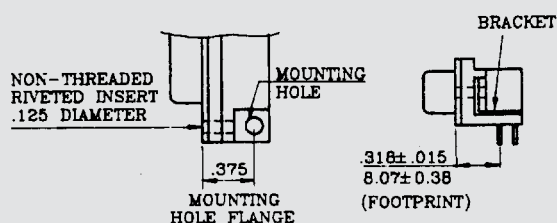

OPTION OT

WITH GROUNDING STRAPS, WITH .125 DIAMETER NON-THREADED MOUNTING HOLES, AND WITH .125 DIAMETER NON-THREADED RIVETED INSERTS

