



DRH SERIES

D-SUB CONNECTOR HIGH DENSITY RIGHT ANGLE TYPE

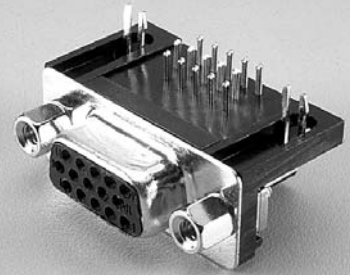

DRH - E15SB - NJ - 000 ◀ EXAMPLE

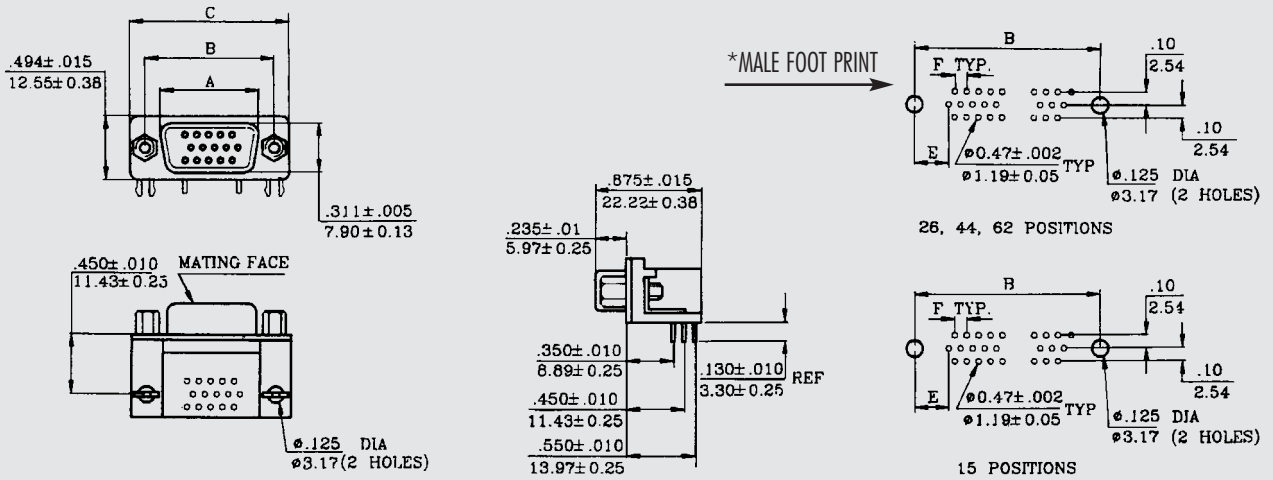

DIMENSIONS

SHELL SIZE	NO. OF CONTACT POSITIONS	A 0.010 0.25	B 0.005 0.13	C 0.015 0.38	E 0.010 0.25	F 0.005 0.13
E	15	0.643 16.33	0.984 24.99	1.213 30.81	0.277 7.04	0.090 2.29
A	26	0.971 24.66	1.312 33.32	1.541 39.14	0.271 6.88	0.090 2.29
B	44	1.511 38.38	1.852 47.04	2.088 53.04	0.271 6.88	0.090 2.29
C	62	2.159 54.84	2.500 63.50	2.729 69.32	1.275 6.99	0.95 2.41

MOUNTING OPTIONS:

- X:** GROUNDING BRACKET, WITH JACK SCREWS
- N:** GROUNDING BRACKET, WITH #4-40 THREADED INSERTS
- NJ:** GROUNDING BRACKET, WITH #4-40 THREADED INSERTS, AND JACK SCREWS ASSEMBLED TO CONNECTOR
- NS:** GROUNDING BRACKET, WITH ROUND #4-40 FIXED STANDOFF

HOW TO ORDER

SERIE	SHELL	PINS	M/F	MOUNTING OPTIONS	CONTACT PLATING	INSULATOR COLOR	SHELL FINISH
EXAMPLE → DRH	E	15	SB	NJ	0	0	0
DRH	E A B C	15 26 44 62	P SB	*NJ X N NS	*0 = G/F 1 = SEL G/F 2 = 5 μ" 3 = 10 μ"	*0 = BLACK 1 = WHITE 2 = BLUE 3 = GRAY	*0 = TIN 1 = NICKEL 2 = ZINC 3 = ALL PLASTIC

*STANDARD