multimec® 3A + 1B/1C + 2A/2B

Technical Data

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:
  low temp: -40/+115°C
  high temp: -40/+160°C

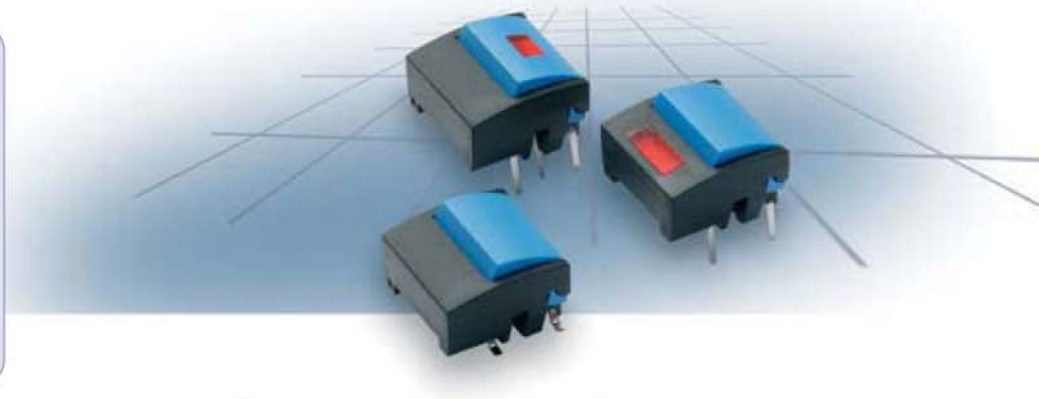

Dimensions (through-hole)

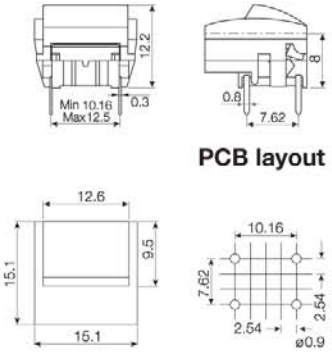

Dimensions w/LED in switch (1C)

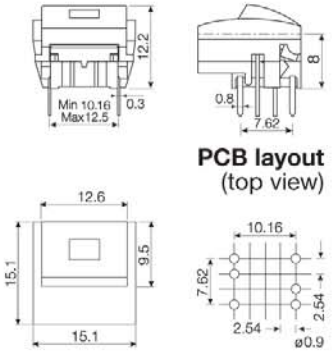

Dimensions w/LED PCB mounted (2B)

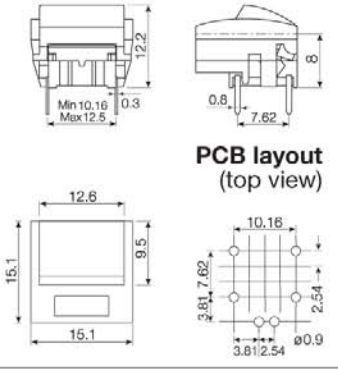

Dimensions (SMD)

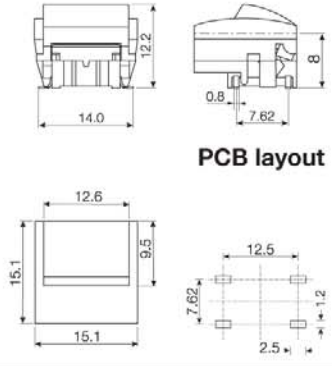

How to order

3 A — **Switch**

Mounting
- **T** through-hole
- **S** surface mount

L 6 low temp.
H 9 high temp.

1 B — **Cap**

- **00** blue
- **02** green
- **03** grey
- **04** yellow
- **06** white
- **08** red
- **09** black

2 A — **Bezel**

- **00** blue
- **02** green
- **03** grey
- **04** yellow
- **06** white
- **08** red
- **09** black

For 1B and 2A only:

- **30** ultra blue
- **40** dusty blue
- **42** aqua blue
- **32** mint green
- **33** tele grey
- **34** melon
- **38** noble red
- **50** metal dark blue
- **53** metal light grey
- **57** metal dark grey
- **58** metal bordeaux

---

3 A — **Switch**

T — **Mounting**
- **T** through-hole

L 6 low temp.
H 9 high temp.

LED
- **00** blue
- **20** green
- **40** yellow
- **80** red

1 C — **Cap**

- **00** blue
- **02** green
- **03** grey
- **04** yellow
- **06** white
- **08** red
- **09** black

Lens
- **1** transparent
- **2** green
- **4** yellow
- **8** red

2 A — **Bezel**

- **00** blue
- **02** green
- **03** grey
- **04** yellow
- **06** white
- **08** red
- **09** black

---

3 A — **Switch**

Mounting
- **T** through-hole
- **S** surface mount

L 6 low temp.
H 9 high temp.

1 B — **Cap**

- **00** blue
- **02** green
- **03** grey
- **04** yellow
- **06** white
- **08** red
- **09** black

2 B — **Bezel**

- **00** blue
- **02** green
- **03** grey
- **04** yellow
- **06** white
- **08** red
- **09** black

Lens
- **1** transparent
- **2** green
- **4** yellow
- **6** frosted white
- **8** red

2 B X X X — **LED** for 2B bezel

- **20** green
- **40** yellow
- **80** red

Keycaps and bezels shown on this page can also be used on **illumec™ switch 4A - see page 9. Part nos. for bezels for 4A are 2C and 2D.**

Ordering example: 3ATL640 + 1C094 + 2A04