


Technical Data


- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:
 - low temp: -40/+115°C
 - high temp: -40/+160°C




Dimensions (through-hole)

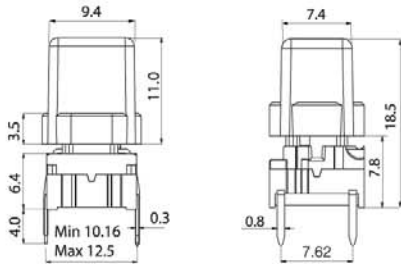


PCB layout

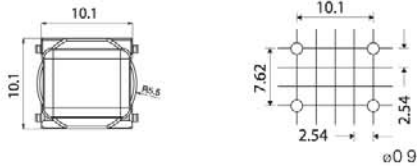


Dimensions (w/LED)

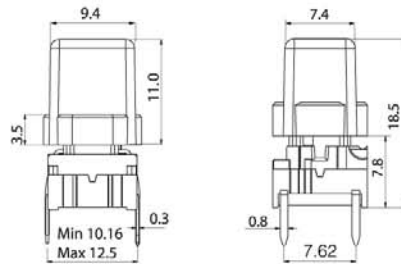


PCB layout (top view)

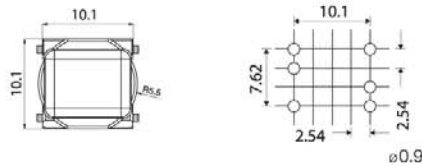

Dimensions (SMD)

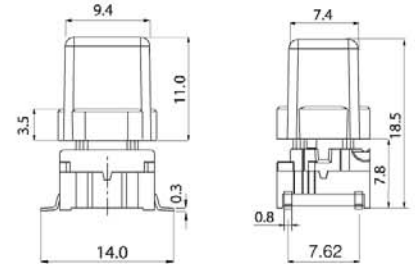

PCB layout

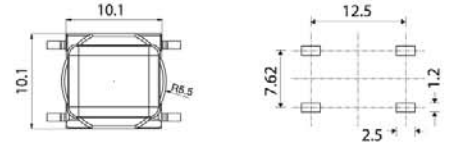

How to order

3 F	<input type="checkbox"/>	<input type="checkbox"/>	+	1 X	<input type="checkbox"/>		
Switch	Mounting	L 6 low temp. H 9 high temp.		Cap	00 blue 02 green 03 grey 04 yellow 06 white 08 red 09 black	30 ultra blue 40 dusty blue 42 aqua blue 32 mint green 33 tele grey 34 melon 38 noble red	50 metal dark blue 53 metal light grey 57 metal dark grey 58 metal bordeaux

3 F	T	<input type="checkbox"/>	+	<input type="checkbox"/>	1 X	<input type="checkbox"/>
Switch	Mounting	L 6 low temp. H 9 high temp.		LED	Cap	11 transparent 16 frosted white
	T through-hole			00 blue 20 green 40 yellow 60 white 80 red 2040 green/yellow 8020 red/green 8040 red/yellow		

Keycaps shown on this page can also be used on **illumec™ switch 4F** - see page 13

Ordering example: 3FTL6 + 1X09 or 3FTL680 + 1X11