

### Through-hole Versions

3A		3C		3E		3F	
For 1A/1B/1M/1ZA/1ZB	w/LED for 1C/1H			For 3E actuators/Varimec	For 1D/1K/1N/1P/1S/1T/1U/1V/1WA/1WD/1WG/1WP/1X/1ZC/1GA/1GC	w/LED for 1D/1E/1F/1N/1Q/1R/1S/1X	w/LED for 1K/1KB/1KC/1T/1U/1V/1WA/1WD/1WP
3ATL6 3ATH9		3ATL600/20/40/80		3CTL6/3CTL9 3CTH9		3FTL6 3FTH9	
3ATL600/20/40/80		3CTL6/3CTL9 3CTH9		3ETLXX-H* 3ETHXX-H*		3FTL600/20/40/60/80/ 2040/8020/8040	
* 3E available in 6 standard heights: 08.0, 09.5, 10.4, 11.0, 12.0, 15.0 mm. Other heights between 08.0 and 15.0 mm are available upon request.							
Specials: Gold contacts, quiet version and actuation force other than 3.0N							

### Standard Versions


Surface Mount Versions				illumecc™ Through-hole Versions		illumecc™ Surface Mount Versions	
3A	3C	3E	3F	4AT w/LEDs	4FT w/LEDs	4AS w/LEDs	4FS w/LEDs
For 1A/1B/1M/1ZA/1ZB		For 3E actuators/Varimec	For 1D/1K/1N/1P/1S/1T/1U/1V/1WA/1WD/1WP/1X/1ZC/1GA/1GC	For 1C/1H	For 1D/1E/1F/1K/1KB/1KC/1N/1Q/1R/1S/1T/1U/1V/1WA/1WD/1WP/1X	For 1C/1H	For 1D/1E/1F/1K/1KB/1KC/1N/1Q/1R/1S/1T/1U/1V/1WA/1WD/1WP/1X
Standard Versions				Standard Versions			
3ASH9/3ASH9R		3CSH9/3CSH9R		3ESH9/3ESH9R		3FSH9/3FSH9R	
3ASH901/22/42/61/82/ 2242/8222/8242		3CSH901/22/42/61/82/ 2242/8222/8242		3ESH901/22/42/61/82/ 2242/8222/8242		3FSH901/22/42/61/82/ 2242/8222/8242	

Co-planarity = ≤ 0.05

### Right Angle Versions

3C	3E	3F	3F w/LED
	For 3E actuators/Varimec	For 1D/1K/1N/1P/1S/1T/1U/1V/1W/1WA/1WD/1WP/1X/1ZC/1GA/1GC	For 1D/1E/1F/1N/1Q/1R/1S/1X
Standard Versions			
3CTL6RAS		3FTL6RAS	
3ETXX-X.XRAS		3FTL600/20/40/60/80/ 2040/8020/8040RAS	

### multimec® Cross Section

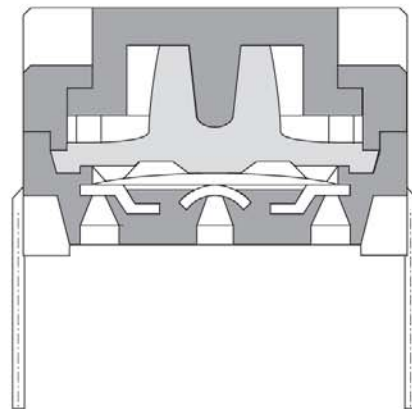

DIMENSIONS (mm) Unless otherwise specified, all tolerances ± 0.2