





.025" SQ BASIC SPACERS BHB SERIES

Mates with:
SSW, SSQ, ESW, ESQ,
CLH, CES, SLW, BSW,
BCS, SSM, IDSS, IDSD

Specifications: BHB

Insulator Material:
Black Glass Filled Polyester
Terminal Material:
Brass
Current Rating:
3A
Operating Temp Range:
-65°C to +105°C
Plating:
Sn or Au over 50µ"
(1.27µm) Ni

BHB	NO. PINS PER ROW	LEAD STYLE	PLATING	ROW OPTION	STACKER HEIGHT						
		Specify LEAD STYLE from chart	-T = 150µ" (3,81µm) Tin	-S = Single Row							
		<table border="1"> <thead> <tr> <th>LEAD STYLE</th> <th>OAL</th> </tr> </thead> <tbody> <tr> <td>-01</td> <td>(10,92) .430</td> </tr> <tr> <td>-02</td> <td>(13,46) .530</td> </tr> </tbody> </table>	LEAD STYLE	OAL	-01	(10,92) .430	-02	(13,46) .530	-GF = 3µ" (0,08µm) Gold flash	-D = Double Row	
LEAD STYLE	OAL										
-01	(10,92) .430										
-02	(13,46) .530										

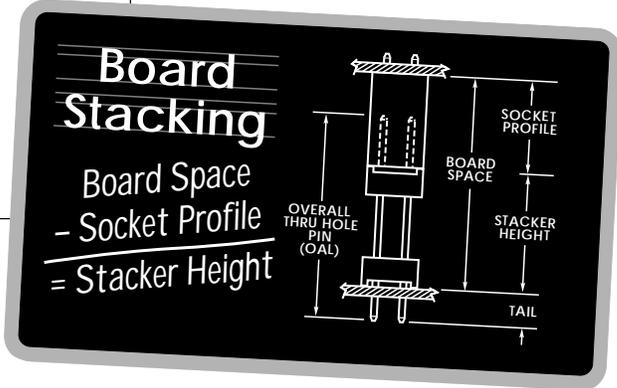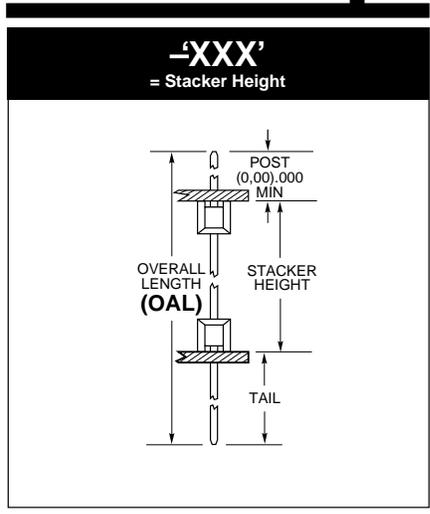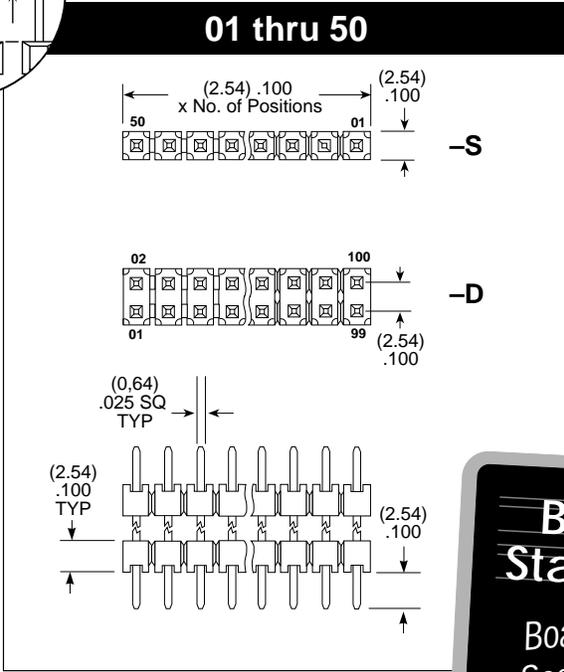

APPLICATION SPECIFIC OPTION

Other pin lengths available.
Call Samtec.

Note: These Series are non-standard, non-returnable.