


# .025" SQ BASIC HEADERS BHT SERIES

**Mates with:**  
SSW, SSQ, ESW, ESQ,  
BCS, BSW, IDSD, IDSS,  
CES, SLW




**Specifications:**  
**BHT**

**Insulator Material:**  
Black Glass Filled Polyester,  
except -VS option is Black  
Liquid Crystal Polymer  
**Terminal Material:**  
Brass  
**Current Rating:**  
3A  
**Operating Temp Range:**  
-65°C to +105°C  
**Max Processing Temp:**  
230°C for 60 seconds  
(-VS option only)  
**Plating:**  
Sn or Au over 50µ" (1.27µm) Ni

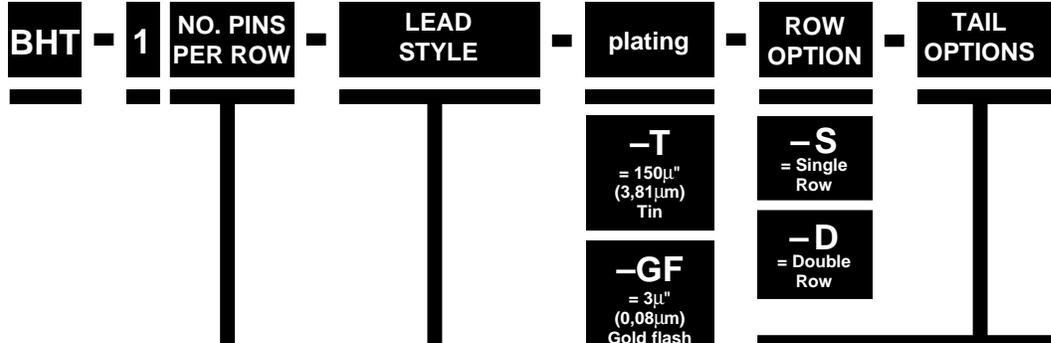

**Specify LEAD STYLE from chart**

LEAD STYLE	A	B	C
-01	(2,54) .100	(10,92) .430	(5,84) .230
-02	(5,08) .200	(13,46)	(8,13) .320
-03	(2,79) .110	.530	(5,84) .230
-04	(2,92) .115	(11,30) .445	(5,84) .230

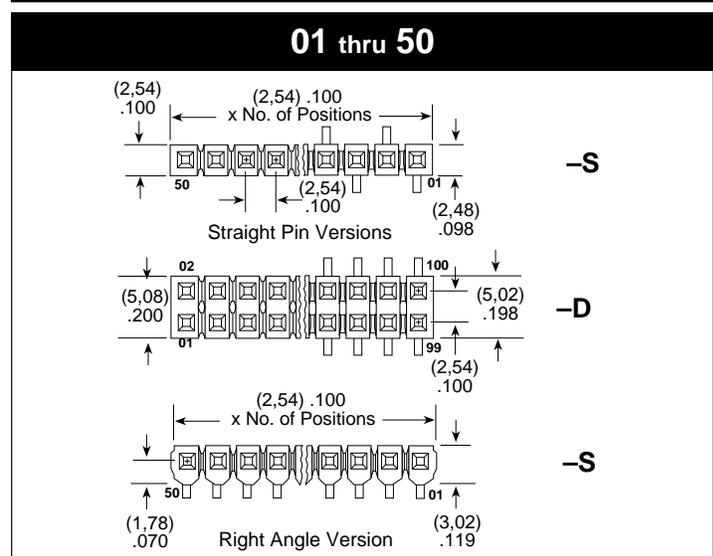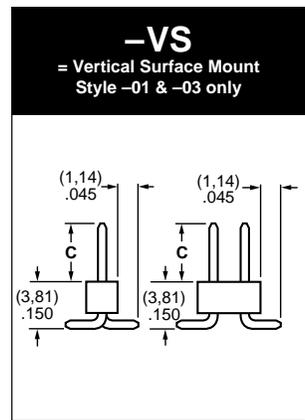

**APPLICATION SPECIFIC OPTION**

Polarization and pick and place pads available.  
Call Samtec.

**Note:** Some lengths, styles and options are non-standard, non-returnable.

*Note: Due to technical progress, all designs, specifications and components are subject to change without notice.*